

462A011 to 060


Transition, one to three cables




Applications

Provides strain relief and mechanical protection on cable harness assemblies.

As supplied (a)

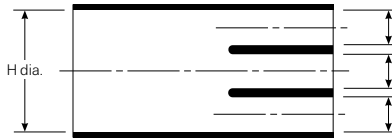

After unrestricted recovery (b)

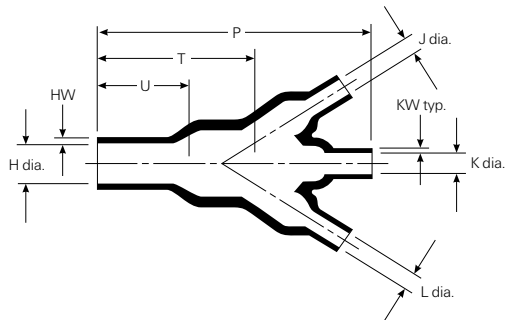

Available in:

Americas

Europe

Asia Pacific



Fax-on-demand

US only (800) 260-9099

Outside US (650) 257-2301

Fax ID

3436

Description

SCD

Visit our website at www.tycoelectronics.com**Materials available**

Material*	Material description	Precoating no.	Adhesive part no.**
-3	Semirigid polyolefin	/42 or /86	S-1017 or S-1048
-4	Flexible polyolefin	/42 or /86	S-1017 or S-1048
-12	Viton	N/A	S-1255-04
-25	Fluid-resistant elastomer	/42 or /86 or /225	S-1017 or S-1048 or S-1125
-100	Polyolefin, Zerohal	-100-CS1972	S-1030

(S1030 tape supplied in bag)

*For more information, please see the appropriate material page in this section.

**For more information, please see Section 5 of this catalog.

Product dimensions (mm/in)

Part number	H		J, K&L		P
	Min. a	Max. b	Min. a	Max. b	±10% b
462A011	13.2 (.52)	6.6 (.26)	6.6 (.26)	3.6 (.14)	46.2 (1.82)
462A023	26.9 (1.06)	13.2 (.52)	13.2 (.52)	6.9 (.27)	93.2 (3.67)
462A034	38.6 (1.52)	18.8 (.74)	19.3 (.76)	9.7 (.38)	135.1 (5.32)
462A046	55.6 (2.19)	25.4 (1.00)	26.9 (1.06)	12.4 (.49)	192.0 (7.56)
462A060	91.4 (3.60)	54.6 (2.15)	45.7 (1.80)	27.4 (1.08)	390.4 (15.37)

	T	U	HW	KW
	±10% b	±10% b	±20% b	±10% b
426A011	30.5 (1.20)	15.7 (.62)	1.52 (.06)	1.02 (.04)
462A023	57.2 (2.25)	33.0 (1.30)	2.54 (.10)	1.52 (.06)
462A034	88.9 (3.50)	45.7 (1.80)	3.05 (.12)	1.78 (.07)
462A046	121.9 (4.80)	71.1 (2.80)	4.57 (.18)	3.05 (.12)
462A060	254.0 (10.00)	127.0 (5.00)	7.11 (.28)	4.57 (.18)

Note: Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by 1.5 mm (.06") max.