


Connect the W10x-HD camera to a Full High Definition monitor and take advantage of the astonishing resolution and excellent image colour and contrast in your inspection work.




Together with any of Optilias Articulated Boom or XY-stands, the system offers full control over large working area or when the inspected object needs to be tilted into different angles and levels.

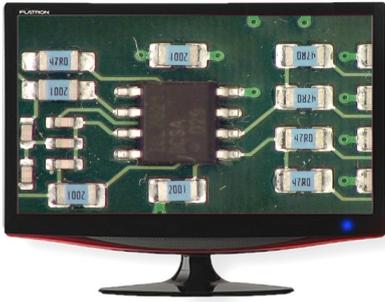








W10x-HD significantly reduces the time spent on inspecting objects compared to other optical visual systems.

High Definition Inspection Camera

Optilia W10x-HD is a professional inspection camera with 10x optical zoom, large working distance, quick autofocus and laser pointer for reliable, ergonomic and fast Visual Inspection work.

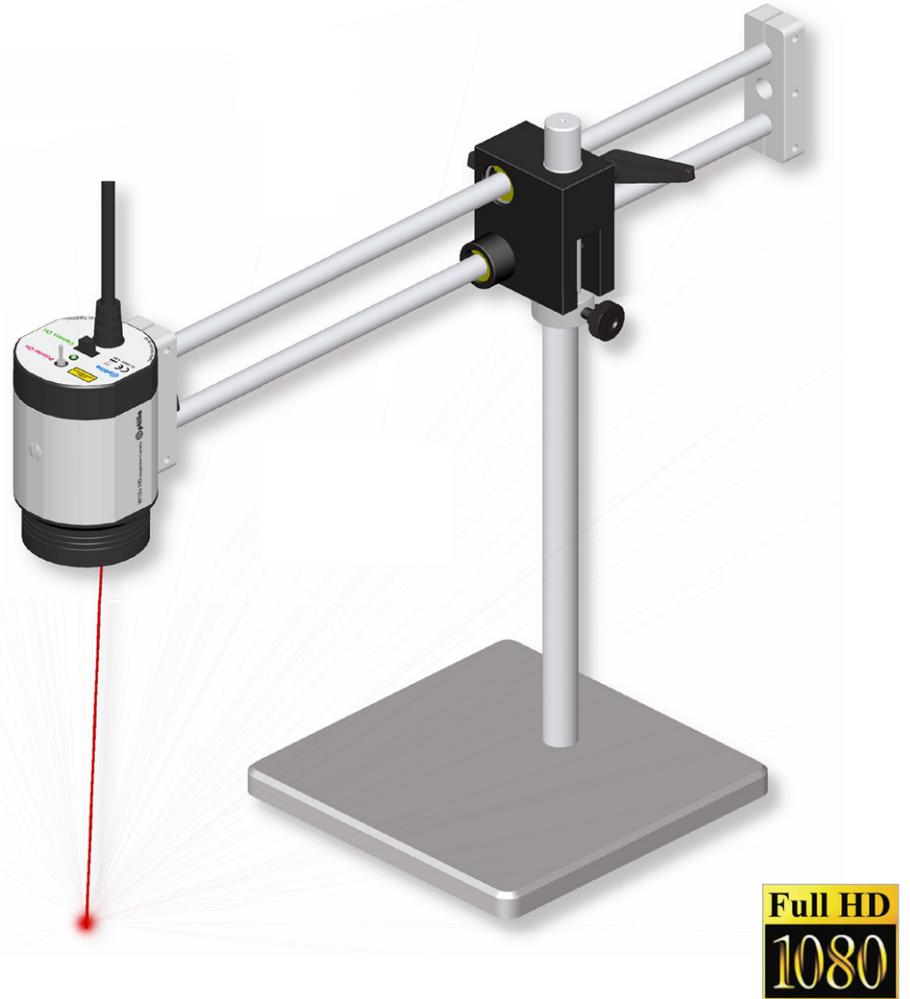


High Quality, Flexible Optical Inspection Systems






W10x-HD provides relief to the user's eyes, neck and shoulders. By sitting comfortably and watching the monitor, the inspection task is no longer tiresome. Traditional microscopes may offer excellent magnified images but puts extraordinary strain on eyes and neck.


The built-in laser pointer assists in finding the area of interest even in high magnification mode. To further simplify operation, the 10x zoom can be controlled directly from the camera or by a foot pedal.

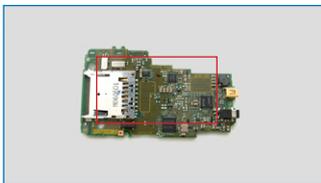

3x Magnification

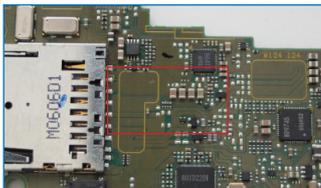

10x Magnification

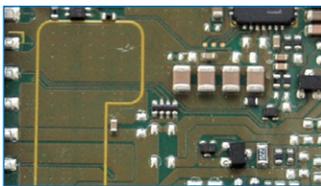

30x Magnification

In most cases, the system's 3-30x on-screen magnification (24" monitor) is comparable to common ocular microscopes and can therefore directly replace those. If further magnification is needed, close-up lenses can be added to magnify up to 100x.



Parameter	HD Video Inspection	Stereo Microscope
Functions		
Ergonomy	Excellent	Poor
Large Working Distance	Excellent	Good
Large Field of View	Excellent	Good
Flexibility	Excellent	Good
Depth of View	Good	Excellent
Applications		
Visual Inspection	Excellent	Excellent
Video/Image recording	Excellent	Optional
Documentation	Excellent	Optional
Repair/Rework	Good	Good
Assembly work	Excellent	Good

Comparison of HD Video and Stereo Microscope Inspection.

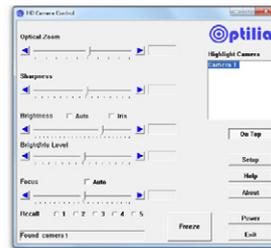


Image attributes, such as brightness, contrast, focus, iris, image sharpness, colour and other parameters are automatically set but can be controlled manually by the user through the Software or from the joystick based multi-function Control Unit without need to a PC.

The system offers great flexibility to users with different inspection and monitoring needs. Apart from transferring excellent details from the object to the High-Definition monitor, it grants true ease of use and minimal interaction with controls and settings.



W10x-HD is made of high quality components, stainless steel and anodized aluminum parts. The instrument is designed according to the requirements of electronics manufacturers regarding excellent image quality, flexibility, time and cost effectiveness.

The solid aluminium casing makes the system suitable for deployment in factories, workshops and production facilities as well as in laboratories.


Included items when you order W10x-HD Inspection kit, OP-009 002:

- ✓ Wide angle Full HD inspection camera with 10x zoom, auto focus and laser pointer
- ✓ Boom Stand, ESD-protected
- ✓ Camera control PC software
- ✓ Y-cable for PC connection with USB adapter
- ✓ Power supply



W10x-HD can be configured with following optional accessories:

OP-009 010, W10x-HD
Wide Angle 10x Zoom Full HD Inspection Camera

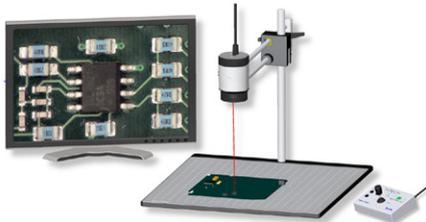


Configuration A: Stand-alone HD Camera with Control Unit and 22" Full HD monitor.

Application: Post production Inspection, Quality control, Assembly work, Repair and Rework



Configuration B: HD Camera with 22" Full HD monitor connected to PC and Optilia Picsara software.

Application: Digital documentation, Measurement, Quality control, R&D, Repair and Rework

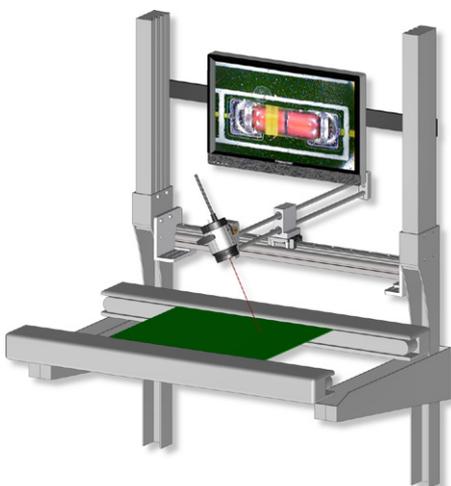


Configuration C: In-line HD Camera with 22" Full HD monitor, XY floating stand with 4-directions Tilt unit.

Application: In-line Visual Inspection of assembled PCBs after Pick & Place and/or after AOI.

Stands and Mounts

OP-006 199, Boom Stand



OP-006 338, Bench-top XY-stand



OP-006 333, In-line XY stand



OP-006 320, 322, 325, 326, Articulated Stands



OP-006 291, Rack & Pinion Focusing unit



OP-006 599, 90 degrees Camera Adapter for boom stand



OP-006 334, 4-directions Camera Tilt unit



Other accessories

OP-009 020, Camera Control Unit



OP-009 019, Foot switch for Camera Control Unit




OP-006 500, XY-floating table



OP-006 505, Foot switch for XY Floating table with position lock



OP-006 501, XY-floating table with position lock



OP-009 305, +5 diopter Close-up lens (f=200mm)



OP-009 308, +10 diopter Close-up lens (f=100mm)



OP-006 381, UV Fluorescent Ring-Light set



OP-006 380, Polarisation Filter set



OP-006 379, White LED RingLight Set



OP-006 383, Diffuser for LED RingLight



OP-009 306, Grip handle for W10x Cameror



OP-006 309, PCI HD Frame Grabber with OptiPix Lite software for MS-Windows




OP-006 369, USB Image capture foot-switch for OptiPix



OP-006 119, Optipix Full, Image view, capture & measurement software incl. calibration micrometer scale



OP-006 190, Aluminum Transport Case, 450x350x250mm with Foam inlet

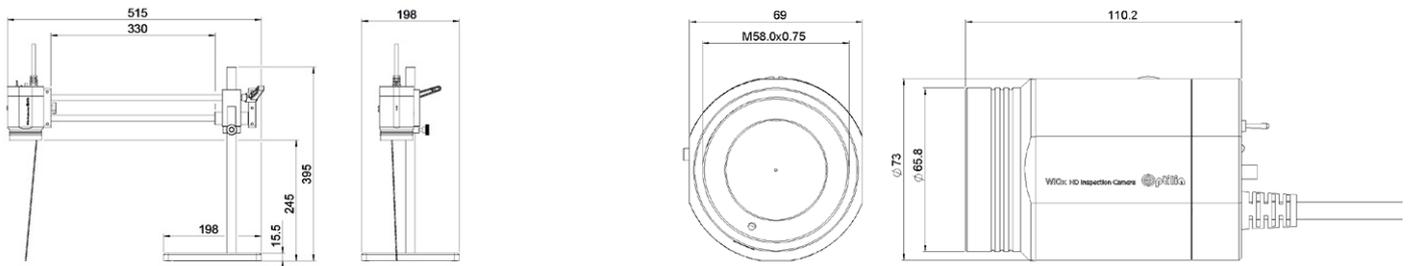

Specifications:

- Image Sensor ● 1/3" CMOS, ~ 2.0M pixels
 Signal Systems ● High Definition 1080i/59.94 (interlace), 1080i/50 (interlace);
 720p/59.94 (progressive), 720p/50 (progressive); PAL, NTSC

- Optics ● Wide angle 10x optical zoom with auto or manual focus, F1.8 to F26

- Working Distance (w/o Close-up) ● ~ 190 - 245 mm
 Working Distance with +5 Close-up ● ~ 90 - 103 mm
 Working Distance with +10 Close-up ● ~ 54 - 61 mm

- Field of View at 1x zoom ● ~ 223 x 125 mm (~ 3x magnification on 32" Monitor)
 Field of View at 5x zoom ● ~ 46 x 26 mm (~ 15x magnification on 32" Monitor)
 Field of View at 10x zoom ● ~ 23 x 13 mm (~ 30x magnification on 32" Monitor)
 Field of View with +5 Close-up (25x zoom) ● ~ 10.5 x 5.9 mm (~ 65x magnification on 32" Monitor)
 Field of View with +10 Close-up (35x zoom) ● ~ 7.5 x 4.2 mm (~ 90x magnification on 32" Monitor)

- Camera Control ● External Control unit device with Joystick or PC Control Software via serial COM or USB2.0 port

- Basic Adjustments ● Optical Zoom, Iris control, Brightness, Sharpness, Focus, White balance
 NIR-mode, Gamma, Setup Save/Recal, Freeze picture, Negative picture

- Laser pointer ● Red LED laser, 0,5mW output power, Laser Class 2

- Inputs/outputs ● DC in (5-pin MiniDin), Serial RS-232 (DB9-F or via COM-USB adapter),
 HD Component Y/Pb/Pr Video out (RCA), PAL/NTSC Video out (RCA)


- Storage Environment ● -20° – +60° C, 5 - 90% RH, non-condensing
 Operating Environment ● 0° – +45° C, 5- 90% RH, non-condensing
 Power Requirement ● 12.0 VDC, 4.8 W max
 Size, Weight ● ϕ 75x117 mm (DxL), 850 gr. Max.



Optilia Instruments AB

Djupdalsvägen 22
 S-192 51, Sollentuna
 Sweden
 Phone: +46 (0)8 35 33 60
 Fax: +46 (0)8 35 33 63
 E-mail: Info@optilia.eu
 Web: www.optilia.eu

Retailer:



Ordering information:	Item	Article Nr.
	W10x-HD, Full HD Inspection Camera system	OP-009 002
	Close-up lens, +5 dioptr	OP-006 305
	Close-up lens, +10 dioptr	OP-006 308
	Camera Control Unit	OP-009 020
	Foot switch for Camera Control Unit	OP-009 019
	In-line XY stand	OP-006 333
	Bench-top XY stand, large area access	OP-006 338
	Articulated Stand, Industrial Grade	OP-006 326
	Articulated Stand, Stainless Steel Grade	OP-006 322
	XY-floating board	OP-006 500
	XY-floating board with Electromagnetic position lock	OP-006 501
	Foot switch (self-locking) for XY Floating Table	OP-006 505
	Grip handle for W10x Cameror	OP-009 306
	4-directions Camera Tilt unit	OP-006 334
	90 degrees Camera Adapter for boom stand	OP-006 599
	PCI-e HD Frame Grabber with view/capture software	OP-006 309
	OptiPix Full, Image view/capture & measurement software	OP-006 119
	USB Image capture foot-switch for OptiPix	OP-006 369

